



CORRUGATED



ICONIC, DURABLE, VERSATILE

As the most recognized type of metal roofing and siding, our Corrugated panels are popular for agricultural and DIY projects. However, they are perfect for any type of project. Built for durability and value, it is arguably the most versatile metal panel. Corrugated roofing is an exposed fastened product offering 24" coverage. Available in Galvalume substrate, our Corrugated panels carry a 25-year warranty that guarantees beauty for decades. As the manufacturer, Mansea Metal will custom cut the panels to your exact specifications, saving you valuable installation time and money. With more than 30 years' experience in the industry, we understand how important your project is and will work with you every "inch" of the way.

www.manseametal.com

www.midwesternbuildings.com


KENTUCKY

925 Rolling Hills Lane
Winchester, KY 40391
Phone: 859.744.4475
Fax: 859.744.4324

ILLINOIS

1181 S.R. 121
Mt. Zion, IL 62549
Phone: 217.864.5835
Fax: 217.864.2297

CORRUGATED

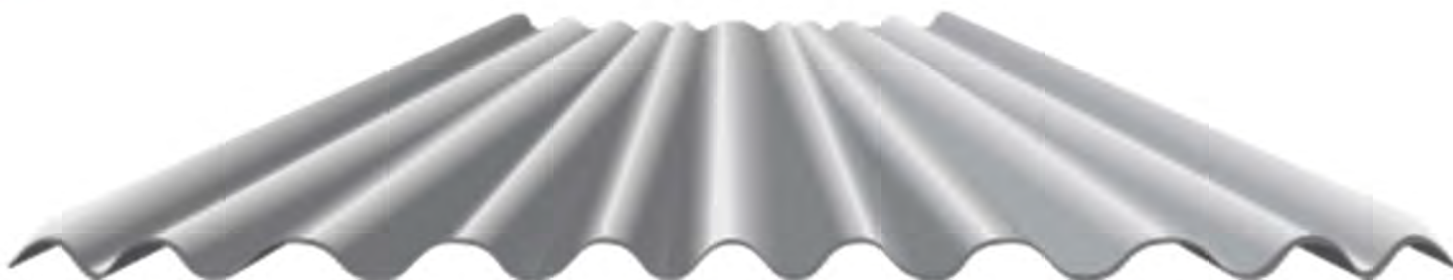

GENERAL INFORMATION

Slope: Minimum recommended roof slope is 3:12.

Coverage: Available in a 1/4" rib height with a 24" coverage.

Length: Minimum cut length is 1'-0". Maximum is 30'-0". *Longer panels need special consideration for erection, packaging, and shipping.*


Substructure: Designed for use over a solid substrate or open structural framing at 24" O.C. *Uniform and properly aligned substructures are necessary to avoid panel distortion.*

Gauge: Available in 29 and 26 gauge in Galvalume finish.

Fasteners: Exposed fastened. Contact your representative for assistance in choosing the proper fastener. See fastening pattern below.



*all panels are subject to surface distortion when fasteners are improperly applied. Fasteners that are over-driven will cause stress across the face of the panel at or near the point of fastening.

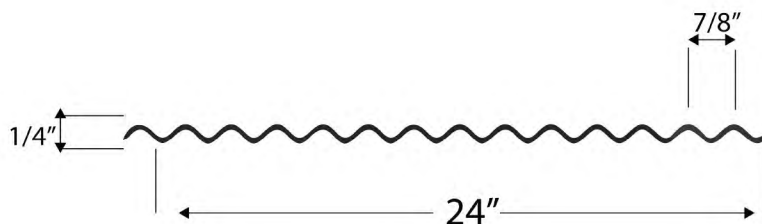

- 24" coverage
- 1/4" rib height
- 7/8" spacing between corrugations
- Galvalume substrate with 25-year warranty
- Traditional design
- Complete line of accessories
- Minimum roof slope - 3:12
- Installs over open or solid substrate
- Can be installed horizontally or vertically

valspar
WeatherXL



www.manseametal.com

www.midwesternbuildings.com

KENTUCKY
925 Rolling Hills Lane
Winchester, KY 40391
Phone: 859.744.4475
Fax: 859.744.4324

ILLINOIS
1181 S.R. 121
Mt. Zion, IL 62549
Phone: 217.864.5835
Fax: 217.864.2297